



NEW  
INTER-TECH  
2021

/

2022



Firma  
Przyjazna  
Klientowi



FIRMA GODNA  
ZAUFANIA

NOW IN STYLE



MADE IN  
POLAND



Over 1000 machines on offer, professional consultants and a team of qualified engineers who create new ideas and solutions in the agricultural sector every day. We bet on quality and continuous development.

By giving this catalog into your hands, we believe that several minutes of your attention given to our company will make your familiar with our offer and make it possible for us to initiate good cooperation.

We invite you to follow our offer on our website and to send us any questions related to the products you are interested in. You can also share your opinions or observations concerning our work.

We are not standing still. We are constantly investing in continuous development, expansion and improvement of our products and services.

Join us...

- A good company thinks outside of the box.
- A good company constantly seeks innovation.
- A good company wins awards.
- A good company conducts online, mobile, event and non-standard PR.
- A good company is based on a good strategy.
- A good company has rich experience and a satisfied customer base.
- A good company respects your brand.
- A good company invites others to cooperate.

We encourage you to cooperate with us  
**InterTech**



I buy Polish

[www.intertech-agro.pl](http://www.intertech-agro.pl)



**BLUE**  
LINE



AGRICULTURAL FIELD  
MACHINERY  
- BLUE LINE

p.  
6-9

UNITS  
HARROWS  
PLANERS FOR MEADOWS AND FIELDS  
SOWING ROLLER.

**GREEN**  
LINE



GRASSLAND MACHINES  
- GREEN LINE

p.  
10-12

SELF-LOADING BALE WRAPPER  
ROTARY RAKES

**SILVER**  
LINE



SLURRY TANKERS  
- SILVER LINE

p.  
13

IT 4000I- IT 20000I

**FRONT  
LOADER**  
LINE



FRONT LOADERS

p.  
14-17

IT 320 – IT 6600

**SMART**  
LINE



EQUIPMENT  
AND ACCESSORIES

p.  
18-27

GRIPPERS  
BUCKETS  
GRAB BUCKETS  
CUTTERS  
GRABS  
PALLET JACKS  
PALLET FORKS  
CONTAINERS

**ORANGE**  
LINE



MUNICIPAL MACHINES

p.  
28-31

XXX...



Ever more

**POSSIBILITIES**

**10** years  
of experience

**1000**  
products  
in our offer


**100.000**  
machines  
manufactured



**LEARN**  
ABOUT OUR  
**OFFER**  
2020



# DISK HARROW HYDRAULIC

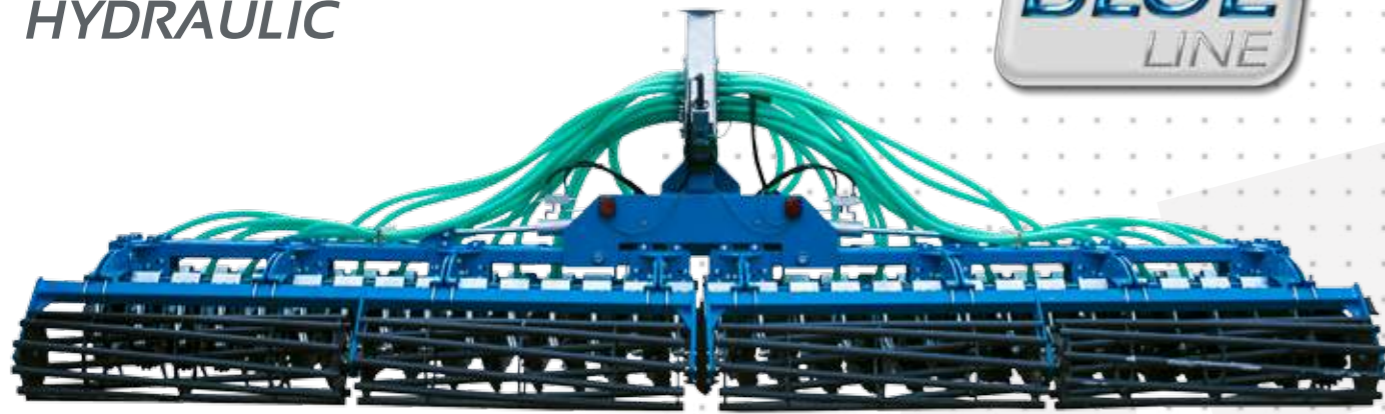

**ATTENTION!**

A different discount is applicable to field machinery - ask INTER-TECH representatives for details or find them in the dealership agreement

Tubular roller and discs 560 in standard version

	IT 4,0H	IT 5,0H	IT 6,0H	IT 7,5H
NUMBER OF DISKS	32	40	48	60
WEIGHT	2600 kg	3000 kg	3500 kg	4200 kg
TRACTOR POWER	From 140 HP	From 170 HP	From 200 HP	From 300 HP
EFFECTIVE PERFORMANCE	1,5 - 2,5 ha	1,8 - 2,7 ha	2-3 ha	3-4 ha
WORKING WIDTH	4,00 m	5,00 m	6,00 m	7,50 m
MACHINE NO.	B1	B2	B3	B4

## TILLAGE AND SOWING UNIT

	IT 2,5	IT 2,7	IT 3,0	IT 4,0
NUMBER OF TINES	16	18	20	26
WEIGHT	650 kg	670 kg	700 kg	880 kg
TRACTOR POWER	80-90 HP	90-100 HP	100-140 HP	140 HP
EFFECTIVE PERFORMANCE	1,5-2,0 ha/h	2,0-3,0 ha/h	2,4-3,4 ha/h	3,2-4,2 ha/h
WORKING WIDTH	2,5 m	2,7 m	3,0 m	4,0 m
MACHINE NO.	B9	B10	B11	B12

ROLLER TYPES	TUBULAR ROLLER Ø 500	PACKER ROLLER Ø 500	CAMPBELL ROLLER Ø 500	CROSSKILL ROLLER Ø 400	RUBBER ROLLER Ø 500
--------------	----------------------	---------------------	-----------------------	------------------------	---------------------

ADDITIONAL OPTIONS	Ø 560 C-DISC	Ø 610 C-DISC	LIGHTING	GAUGE WHEELS	HYDRAULIC ROLLER REGULATION	APPLICATOR	TRANSPORT TRUCK
--------------------	--------------	--------------	----------	--------------	-----------------------------	------------	-----------------

ROLLER TYPES	TUBULAR ROLLER Ø 420	STRING ROLLER Ø 320	PACKER ROLLER Ø 500	ADDITIONAL OPTIONS	THIRD ROW OF TINES
--------------	----------------------	---------------------	---------------------	--------------------	--------------------



## HEAVY DISK HARROW

	IT 3,0
NUMBER OF DISKS	24
WEIGHT	1780
TRACTOR POWER	100-130
EFFECTIVE PERFORMANCE	1,5-2,5
WORKING WIDTH	3 m
MACHINE NO.	B13

	IT 2,5	IT 2,7	IT 3,0	IT 4,0
NUMBER OF DISKS	20	22	24	32
WEIGHT	1000 kg	1050 kg	1300 kg	1570 kg
TRACTOR POWER	80-100 HP	90-110 HP	100-120 HP	120-150 HP
EFFECTIVE PERFORMANCE	1,6-2,4 ha/h	1,8-2,6 ha/h	2,0-3,0 ha/h	2,8-4,2 ha/h
WORKING WIDTH	2,5 m	2,7 m	3,0 m	4,0 m
MACHINE NO.	B5	B6	B7	B8

ROLLER TYPES	TUBULAR ROLLER Ø 500	PACKER ROLLER Ø 500	CAMPBELL ROLLER Ø 500	CROSSKILL ROLLER Ø 400	RUBBER ROLLER Ø 500
--------------	----------------------	---------------------	-----------------------	------------------------	---------------------

ADDITIONAL OPTIONS	HYDRAULIC REGULATION OF REAR ROLLER	Ø 560 DISKS	LIGHTING	FEET FOR SOWER
		POLISH P-TYPE ITALIAN P-TYPE C-TYPE		

Tubular roller, 510 discs and hydropack in standard version

ROLLER TYPES	TUBULAR ROLLER Ø 500	PACKER ROLLER Ø 500	CAMPBELL ROLLER Ø 600	RUBBER ROLLER Ø 500
--------------	----------------------	---------------------	-----------------------	---------------------

Tubular roller and 610 discs in standard version

ADDITIONAL OPTIONS	LIGHTING	HYDRAULIC REGULATION OF REAR ROLLER
--------------------	----------	-------------------------------------



## HEAVY SUSPENDED SPIKE-TINES HARROW

	IT 3,2	IT 5,3	IT 7,5	IT 9
WORKING WIDTH	3,2 m	5,3 m	7,5 m	9 m
CULTIVATION DEPTH	12 cm	12 cm	12 cm	12 cm
TINE TYPE	PH 20	PH 20	PH 20	PH 20
NUMBER OF SECTIONS	3 pcs.	5 pcs.	7 pcs.	9 pcs.
NUMBER OF TINES IN SECTION	20 pcs.	20 pcs.	20 pcs.	20 pcs.
TRACTOR POWER	60-70 HP	90-110 HP	From 100 HP	From 140 HP
WEIGHT	350 kg	530 kg	980 kg	1190 kg
MACHINE NO.	B14	B15	B16	B17

ADDITIONAL OPTIONS	LIGHTING	WHEEL (9 FOR HARROWS IN STANDARD VERSION)
--------------------	----------	---



**HELICAL SKIMMING CULTIVATOR**

	IT 2,1	IT 2,6	IT 3,0
NUMBER OF TINES	5	6	7
WEIGHT	700 kg	800 kg	870 kg
TRACTOR POWER	65-80 HP	80-100 HP	100-140 HP
EFFECTIVE PERFORMANCE	1,5-2,1 ha/h	1,8-2,6 ha/h	2,1-3,0 ha/h
WORKING WIDTH	2,10 m	2,60 m	3,00 m
MACHINE NO.	B18	B19	B20

**SPRUNG SKIMMING CULTIVATOR**

	IT 2,1	IT 2,6	IT 3,0
NUMBER OF TINES	5	6	7
WEIGHT	1000 kg	1150 kg	1300 kg
TRACTOR POWER	80-100 HP	100-120 HP	110-140 HP
EFFECTIVE PERFORMANCE	1,47-2,1 ha/h	1,8-2,6 ha/h	2,1-3,0 ha/h
WORKING WIDTH	2,10 m	2,60 m	3,00 m
MACHINE NO.	B21	B22	B23

ROLLER TYPES	TUBULAR ROLLER Ø420	PACKER ROLLER Ø500	CAMPBELL ROLLER Ø500
--------------	---------------------	--------------------	----------------------


**DRAG FOR FIELDS AND MEADOWS**



	4M		
TYPE OF UNFOLDING	manual	manual	hydraulic
NUMBER OF ROWS	3	4	4
NUMBER OF CYLINDERS	-	-	1 cylinder
WEIGHT	490 kg	530 kg	550 kg
MACHINE NO.	B24	B25	B26

	5M		6M		8M	
TYPE OF UNFOLDING	hydraulic	hydraulic	hydraulic	hydraulic	hydraulic	hydraulic
NUMBER OF ROWS	3	4	4	3	4	4
NUMBER OF CYLINDERS	11 cylinders	1 cylinder	11 cylinders	11 cylinders	1 cylinder	11 cylinders
WEIGHT	520 kg	595 kg	605 kg	650 kg	705 kg	900 kg
MACHINE NO.	B27	B28	B29	B30	B31	B32

ADDITIONAL OPTIONS	GALVANIZATION
--------------------	---------------

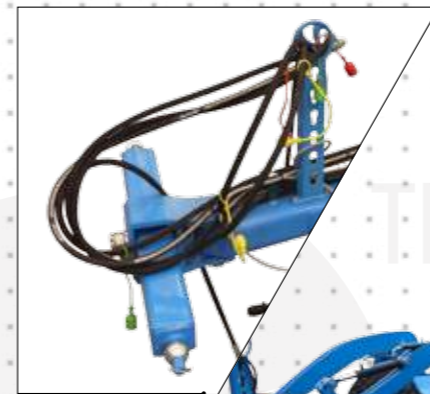

**SOWING ROLLER**

	4,5	5,3	5,3	6,3	6,3	7,5
CAST SIZE	500	500	600	500	600	500
TRACTOR POWER	80-110 HP	85-115 HP	95-120 HP	95-120 HP	100-130 HP	120-140 HP
WEIGHT	2250 kg	2530 kg	4150 kg	2850 kg	4490 kg	3320 kg
MACHINE NO.	B34	B35	B36	B37	B38	B39

ADDITIONAL OPTIONS	SPRING DRAG WITH HYDRAULIC REGULATION	LED LIGHTING	ADJUSTABLE LOCK CYLINDERS	SHOCK ABSORBER
--------------------	---------------------------------------	--------------	---------------------------	----------------



**FRONT HITCH DISC HARROW**

	2,5	3,0
WORKING DEPTH	max 100 mm	max 100 mm
WEIGHT OF UNIT	650 kg	715 kg
RING SET - NUMBER OF RINGS	30 pcs.	36 pcs.
DISCS	From 1,7 to 2,5 ha/h	From 2 to 3 ha/h
MACHINE NO.	B40	B41

ADDITIONAL OPTIONS	DRAG TINE 32/10	DRAG TINE 45/10	DRAG MADE FROM FLAT BARS	HYDRAULIC DRAG REGULATION	LIGHTING
--------------------	-----------------	-----------------	--------------------------	---------------------------	----------




# GRASSLAND machines



**2**  
YEAR  
GUARANTEE

Learn about products in our **2020 GREEN LINE**

## SELF-LOADING BALE WRAPPER SIDE LOADING

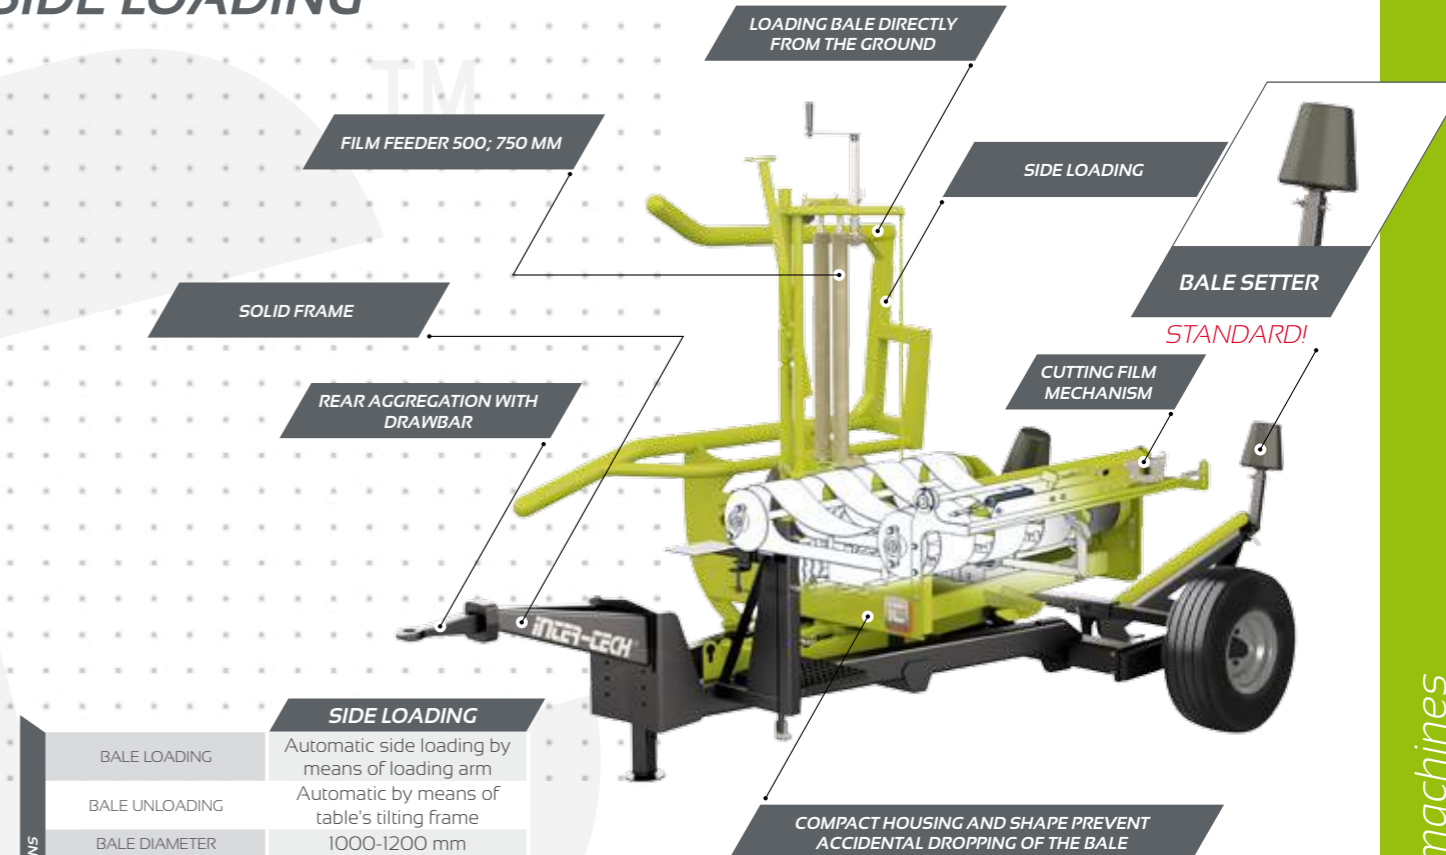

SIDE LOADING	
BALE LOADING	Automatic side loading by means of loading arm
BALE UNLOADING	Automatic by means of table's tilting frame
BALE DIAMETER	1000-1200 mm
FILM WIDTH	500/750 mm
TABLE REVOLUTIONS	16/24 rpm
BALE WRAPPING TIME	2/1.3 min.
MINIMUM TRACTOR POWER	56 HP
WRAPPER	hydraulic from the tractor's power hydraulics system
REVOLVING FRAME DRIVE	hydraulic motor
WRAPS	electronic
MACHINE WEIGHT	1200 kg
MACHINE NUMBER	G1

ADDITIONAL OPTIONS WIDE WHEEL

## SELF-LOADING BALE WRAPPER FRONT LOADING

FRONT LOADING	
BALE LOADING	Automatic front loading by means of loading arm
BALE UNLOADING	Automatic by means of table's tilting frame
BALE DIAMETER	1000-1200 mm
FILM WIDTH	500/750 mm
TABLE REVOLUTIONS	16/24 rpm
BALE WRAPPING TIME	2/1.3 min.
MINIMUM TRACTOR POWER	56 HP
WRAPPER	hydraulic from the tractor's power hydraulics system
REVOLVING FRAME DRIVE	hydraulic motor
WRAPS	electronic
MACHINE WEIGHT	1500 kg
MACHINE NUMBER	G2


**ATTENTION!** A different discount is applicable to the wrapper - ask an INTER-TECH representative for details or find them in the dealership agreement



**ATTENTION!** First start-up of the wrapper by the service department is available - ask sales representatives for details or go to [www.intertech-agro.pl](http://www.intertech-agro.pl)

Grassland machines



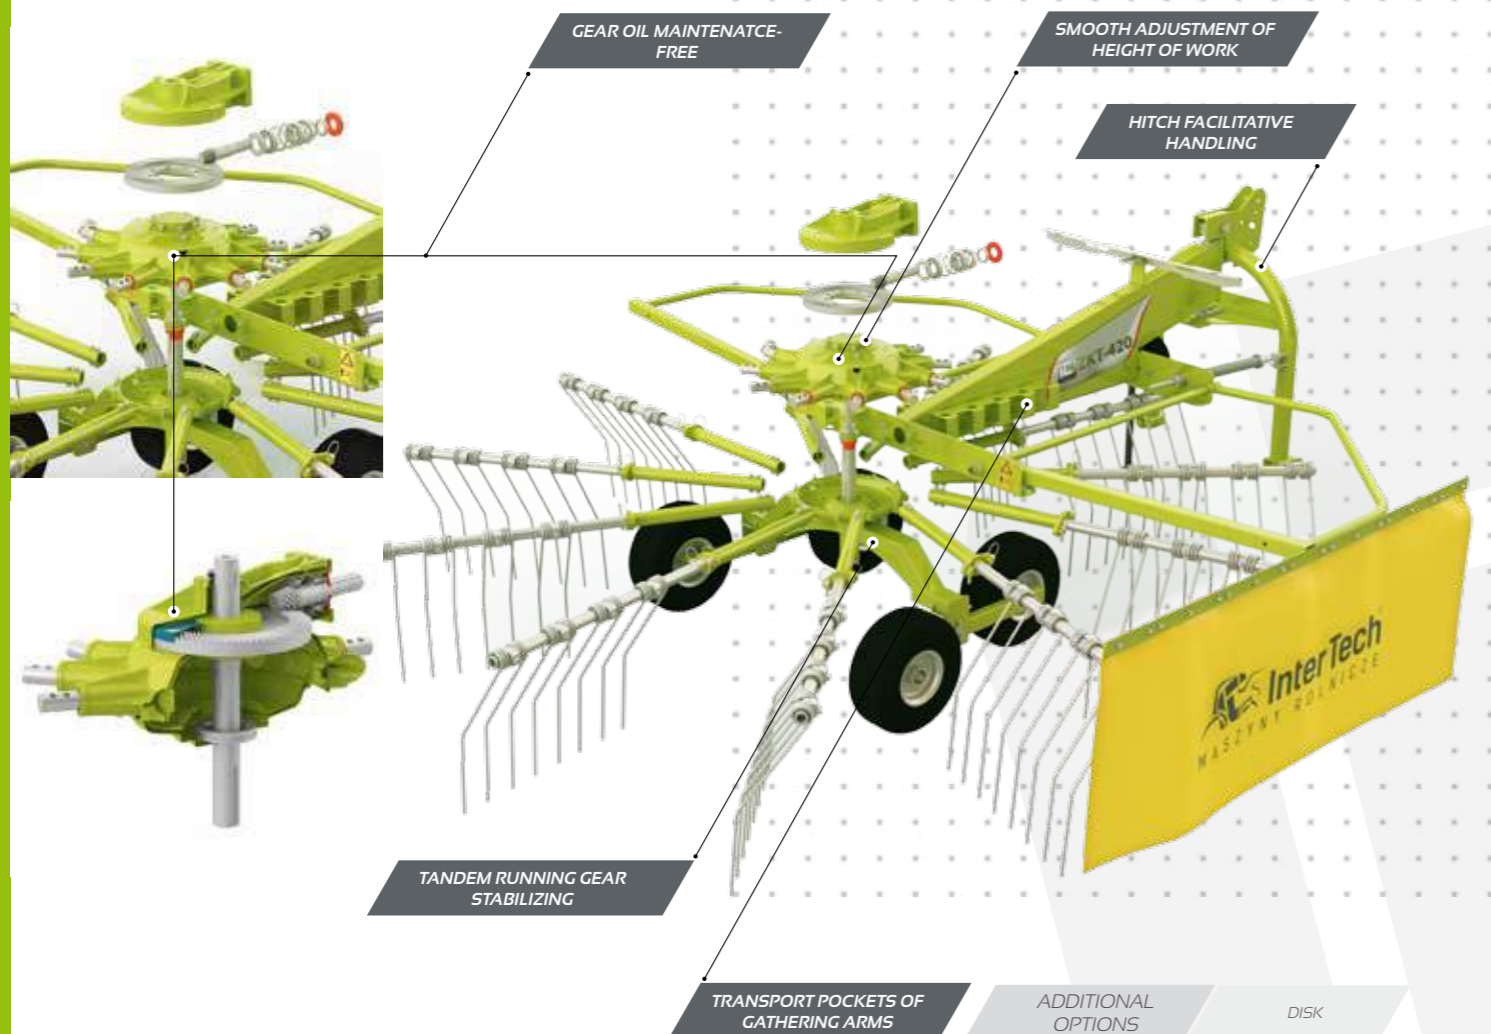

## ROTARY RAKES

**2**  
YEAR  
GUARANTEE

NEW  
PRODUCT



	ZK-350	ZKT-350	ZKT-420	ZKD-800
SUSPENSION CATEGORY	rigid, Cat. I, II	active, Cat. I, II	active, Cat. I, II	semi-suspended three-point hitch, Cat. I, II
SUSPENSION TYPE	single axle/2 wheels	tandem/4 wheels	tandem/4 wheels	tandem/6 wheels per carousel
NUMBER OF WORKING ARMS	9	9	11	22
NUMBER OF TEDDER TINES	27	27	44	88
IN STANDARD VERSION	PTO	PTO	PTO	PTO
PTO REVOLUTIONS	540 rpm	540 rpm	540 rpm	540 rpm
WEIGHT	350 kg	456 kg	530 kg	2050 kg
MACHINE NO.	G3	G4	G5	G6



# SLURRY tankers

- IT 4000 L
- IT 5000 L
- IT 6000 L
- IT 8000 L
- IT 10000 L
- IT 12000 L
- IT 14000 L
- IT 16000 L
- IT 18000 L
- IT 20000 L

Learn about our new product in the


# 2020 SILVER LINE



NEW  
PRODUCT

**Better  
visibility**

**EASIER  
WORK**

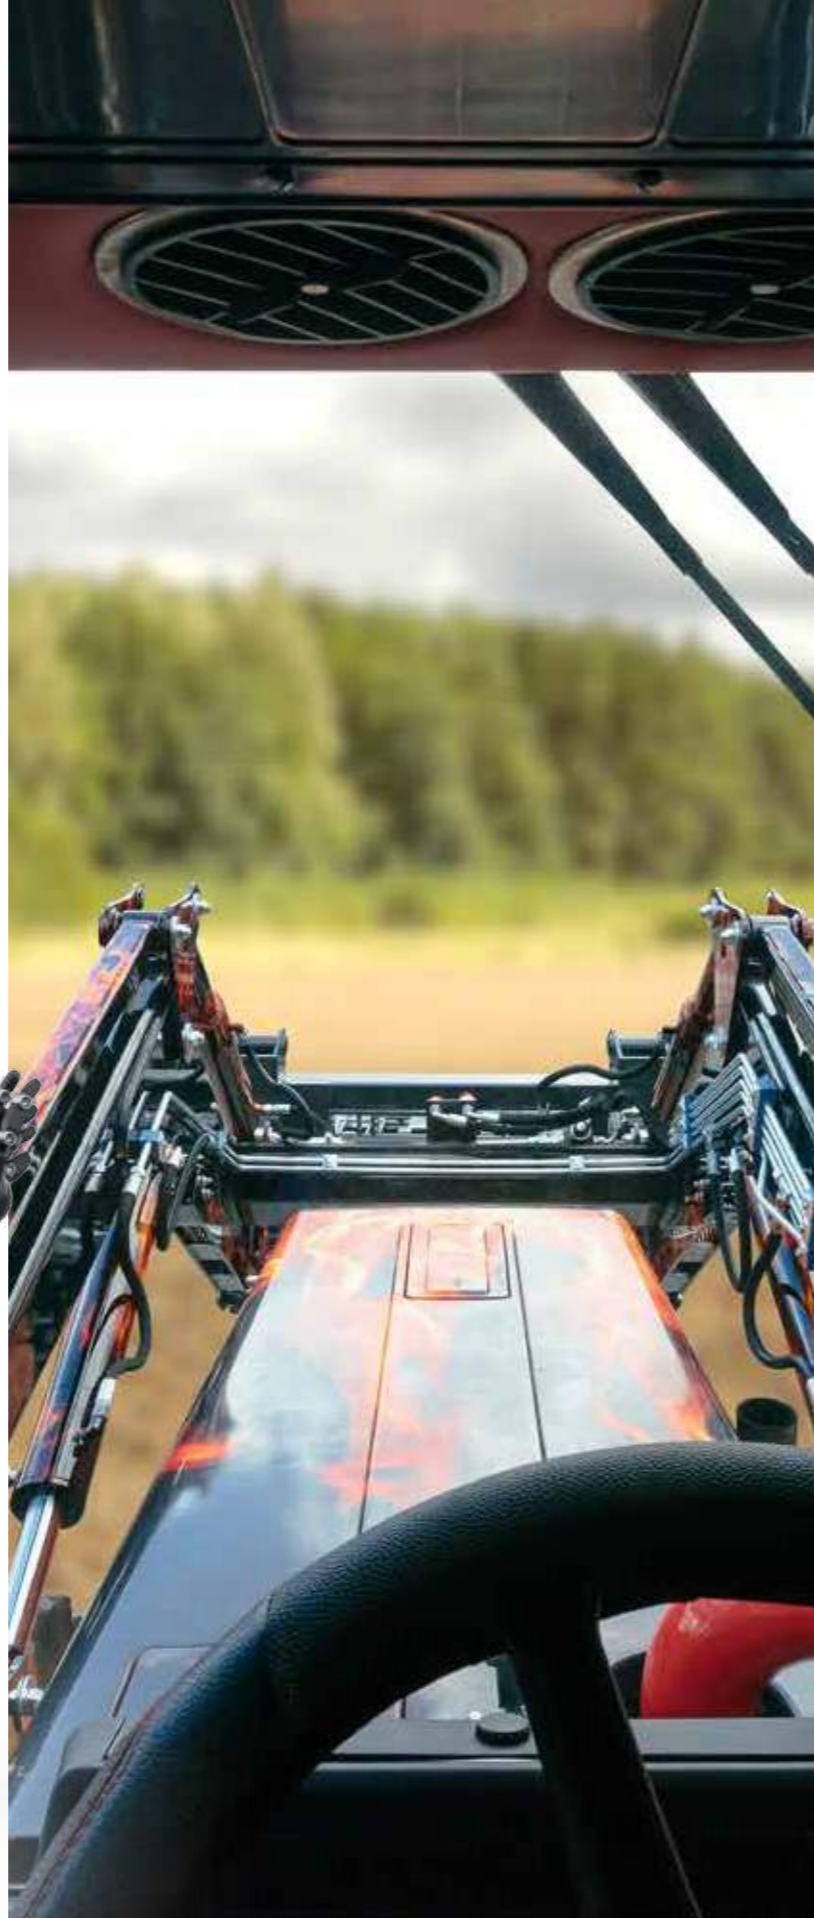

# FRONT loaders

Learn about  
products in our  
**2020**  
FRONT  
LOADER LINE






TECHNICAL SPECIFICATIONS

	IT 320	IT 2600	IT 2600 PLUS	IT 1300	IT 1600
ACTUATOR (INTERIOR DIAMETER OF CYLINDER)	50 mm	70 mm	70 mm	70 mm	80 mm
LIFTING HEIGHT TO JIB EYE	2950 mm	3200 mm	3200 mm	3650 mm	3650 mm
LOADING HEIGHT	2800 mm	2900 mm	2900 mm	3400 mm	3400 mm
HEIGHT AT MAX SHOVEL DEFLECTION	2300 mm	2200 mm	2200 mm	2700 mm	2700 mm
DIGGING DEPTH	120 mm	80 mm	80 mm	150 mm	150 mm
ANGLE OF SHOVEL CLOSURE IN BOTTOM POSITION	54	44	44	46	46
ANGLE OF SHOVEL DEFLECTION IN TOP POSITION	48	52	52	53	53
ANGLE OF SHOVEL CLOSURE IN TOP POSITION	55	60	60	65	65
NOMINAL LIFTING CAPACITY	800 kg	800 kg	800 kg	1300 kg	1600 kg
WEIGHT	305 kg	465 kg	495 kg	590 kg	590 kg
CONTROL	joystick	joystick	joystick	joystick	joystick
SHOCK ABSORBER	-	optional (additional charge)	optional (additional charge)	optional (additional charge)	optional (additional charge)
TYPE OF FASTENING FOR FITTINGS	EURO or SMS	EURO or SMS	EURO or SMS	EURO or SMS	EURO or SMS
TYPE OF SUPPORTS	bottom bracket	side bracket	bottom bracket	bottom bracket	bottom bracket
TYPE OF FASTENING ON TRACTOR	pins	pins	pins	pins	pins
MACHINE NUMBER	L1	L2	L3	L4	L5



IT 1600/S	IT 1600/L	IT 3600	IT 4600	IT 5600	IT 6600
90 mm	90 mm	70 mm	80 mm	90 mm	90 mm
3900 mm	4150 mm	3200 mm	3400 mm	3700mm	4100mm
3650 mm	3900 mm	2905 mm	3205 mm	3505 mm	3905 mm
2950 mm	3200 mm	2285 mm	2585 mm	2885 mm	3285 mm
150 mm	150 mm	80 mm	80 mm	80 mm	80 mm
46	46	44	44	44	44
53	53	52	52	52	52
65	65	60	60	60	60
1600 kg	1600 kg	1200 kg	1500 kg	1600 kg	1600 kg
631 kg	672 kg	600 kg	690 kg	730 kg	775 kg
joystick	joystick	joystick	joystick	joystick	joystick
optional (additional charge)	optional (additional charge)	optional (additional charge)	optional (additional charge)	optional (additional charge)	optional (additional charge)
EURO or SMS	EURO or SMS	EURO or SMS	EURO or SMS	EURO or SMS	EURO or SMS
bottom bracket	bottom bracket	bottom bracket	bottom bracket	bottom bracket	bottom bracket
pins	pins	pins	pins	pins	pins
L6	L7	L8	L9	L10	L11

ADDITIONAL OPTIONS	SHOCK ABSORBER	QUICK COUPLING	ELECTRO/HYDRAULIC DIVIDER
--------------------	----------------	----------------	---------------------------

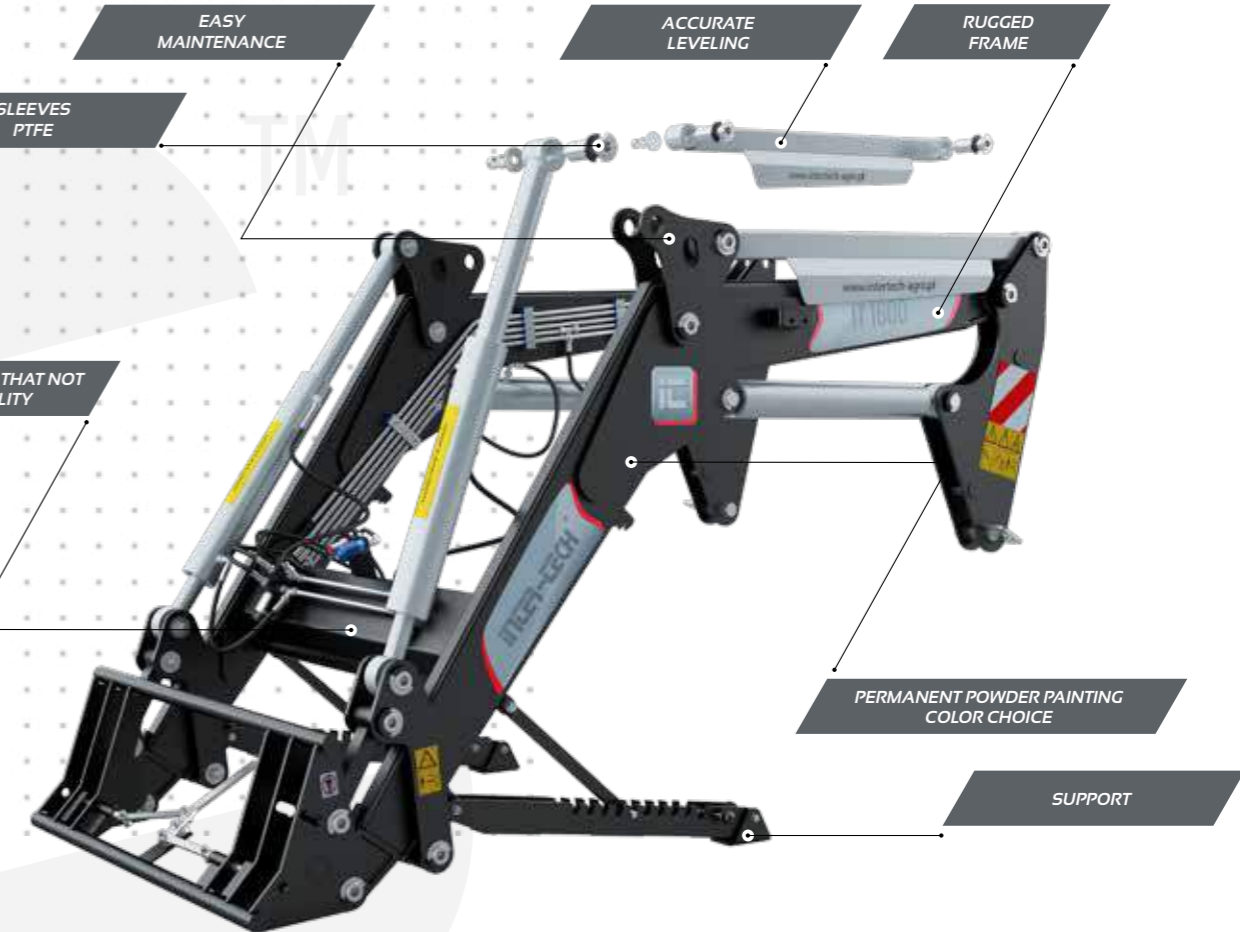

ADDITIONAL OPTIONS	DEFLECTION INDICATOR	SELF-LOCKING FRAME	HYDRAULIC FOOT RETRACTION	HYDRAULIC FRAME CLOSING
--------------------	----------------------	--------------------	---------------------------	-------------------------



TUZ ITFL 1600	
WEIGHT	350 kg
LIFTING CAPACITY	1600 kg
THREE-POINT HITCH (TPH) CATEGORY	II
TPH ARM STEP	765 mm
MACHINE NUMBER	L12

\*sale on selected models of tractors

Front loaders

Front loaders



# EQUIPMENT and accessories

Learn about  
products in our  
**2020**  
SMART LINE



## NEW SOLUTIONS IN THE SERIES



	BALE GRIPPER 1.2/1	BALE GRIPPER 1.2/2	BALE GRIPPER 1.2/3	LARGE BALE GRIPPER
BALE SIZE	1200 mm	1200 mm	1200-1500 mm	1200-1800 mm
LIFTING CAPACITY	700 kg	700 kg	700 kg	700 kg
WEIGHT	201 kg	173 kg	195 kg	256 kg
NUMBER OF CYLINDERS	1	2	1	1
MACHINE NO.	S1	S2	S3	S4
APPLICATION: LOADER, TELESCOPIC LOADER, MINI-LOADER, AVANT				



	RECTANGULAR BALE GRIPPER IT 01	RECTANGULAR BALE GRIPPER IT 02	WOOD GRIPPER	ARM FOR WOOD ON PALLET FORK	GRIPPER FOR CARDBOARD
BALE/GOODS SIZE	995-2000 mm	530-1980 mm	0-820 mm	0-820 mm	600-1900 mm
LIFTING CAPACITY	700 kg	700 kg	700 kg	ND	700 kg
WEIGHT	250 kg	365 kg	300 kg	50 kg	510 kg
MACHINE NO.	S5	S6	S7	S8	S9
APPLICATION: LOADER, TELESCOPIC LOADER, MINI-LOADER, AVANT					



### TRAPEZOIDAL BUCKET

	1,2 M	1,5 M	1,8 M	2,0 M	2,2 M	2,4 M
WEIGHT	119 kg	149 kg	167 kg	179 kg	198 kg	220 kg
CAPACITY	0,29 m³	0,36 m³	0,43 m³	0,48 m³	0,53 m³	0,58 m³
MACHINE NO.	S10	S11	S12	S13	S14	S15
APPLICATION: LOADER						



### VOLUMETRIC BUCKET TUR

	1,8 M	2,0 M	2,2 M	2,4 M
WEIGHT	269 kg	295 kg	321 kg	358 kg
CAPACITY	0,70 m³	0,78 m³	0,86 m³	0,94 m³
MACHINE NO.	S16	S17	S18	S19
APPLICATION: LOADER				

ADDITIONAL OPTIONS

**HARDOX**

EQUIPMENT AND ACCESSORIES

**VOLUMETRIC BUCKET**

		2,0 M	2,2 M	2,4 M
TECHNICAL SPECIFICATIONS	WEIGHT	550 kg	580 kg	600 kg
	CAPACITY	1,45 m <sup>3</sup>	1,60 m <sup>3</sup>	1,75 m <sup>3</sup>
	MACHINE NO.	S20	S21	S22

APPLICATION: TELESCOPIC LOADER

**XXL BUCKET**

		2,0 M	2,2 M	2,4 M
TECHNICAL SPECIFICATIONS	WEIGHT	845 kg	890 kg	935 kg
	CAPACITY	2,00 m <sup>3</sup>	2,20 m <sup>3</sup>	2,40 m <sup>3</sup>
	MACHINE NO.	S23	S24	S25

APPLICATION: TELESCOPIC LOADER

ADDITIONAL OPTIONS

**HARDOX™****BUCKET FOR LIGHT MATERIALS AV**

		1,05 M	1,20 M	1,3 M	1,6 M
TECHNICAL SPECIFICATIONS	WEIGHT	110 kg	130 kg	140 kg	170 kg
	CAPACITY	0,33 m <sup>3</sup>	0,40 m <sup>3</sup>	0,42 m <sup>3</sup>	0,51 m <sup>3</sup>
	MACHINE NO.	S26	S27	S28	S29

APPLICATION: MINI-LOADER, AVANT

**UNIVERSAL BUCKET**

		0,9 M	1,0 M	1,2 M	1,3 M	1,4 M	1,5 M
TECHNICAL SPECIFICATIONS	WEIGHT	143 kg	150 kg	161 kg	173 kg	181 kg	193 kg
	CAPACITY	0,35 m <sup>3</sup>	0,40 m <sup>3</sup>	0,50 m <sup>3</sup>	0,54 m <sup>3</sup>	0,59 m <sup>3</sup>	0,63 m <sup>3</sup>
	MACHINE NO.	S30	S31	S32	S33	S34	S35

APPLICATION: MINI-LOADER

**4-IN-1 BUCKET AV**

		1,1 M	1,2 M	1,3 M	1,4 M	1,6 M
TECHNICAL SPECIFICATIONS	WEIGHT	180 kg	190 kg	200 kg	210 kg	225 kg
	CAPACITY	0,15	0,17	0,18	0,2	0,24
	MACHINE NO.	S36	S37	S38	S39	S40

APPLICATION: MINI-LOADER, AVANT

**4-IN-1 BUCKET FOR CONSTRUCTION APPLICATIONS**

		1,6 M	1,8 M	2,0 M	2,2 M	2,4 M
TECHNICAL SPECIFICATIONS	WEIGHT	355 kg	405 kg	450 kg	500 kg	540 kg
	CAPACITY	0,42	0,47	0,53	0,59	0,64
	MACHINE NO.	S41	S42	S43	S44	S45

APPLICATION: LOADER, MINI-LOADER, TELESCOPIC LOADER

**HIGH-LOADING BUCKET**

		1,6 M	1,8 M	2,0 M	2,2 M
TECHNICAL SPECIFICATIONS	WEIGHT	430 kg	470 kg	510 kg	547 kg
	CAPACITY	0,60 m <sup>3</sup>	0,70 m <sup>3</sup>	0,80 m <sup>3</sup>	0,90 m <sup>3</sup>
	NUMBER OF CYLINDERS	2	2	2	2
	MACHINE NO.	S46	S47	S48	S49

APPLICATION: LOADER, TELESCOPIC LOADER, MINI-LOADER

**OPENWORK BUCKET**

		1,8 M	2,0 M	2,2 M	2,4 M
TECHNICAL SPECIFICATIONS	WEIGHT	365 kg	390 kg	415 kg	440 kg
	CAPACITY	1,05 m <sup>3</sup>	1,15 m <sup>3</sup>	1,28 m <sup>3</sup>	1,40 m <sup>3</sup>
	MACHINE NO.	S50	S51	S52	S53

APPLICATION: LOADER, TELESCOPIC LOADER, MINI-LOADER

**BUCKET WITH BRUSH**

		1,6 M	1,8 M	2,0 M	2,2 M	2,4 M
TECHNICAL SPECIFICATIONS	WEIGHT	355 kg	380 kg	405 kg	430 kg	455 kg
	CAPACITY	0,45 m <sup>3</sup>	0,50 m <sup>3</sup>	0,55 m <sup>3</sup>	0,60 m <sup>3</sup>	0,65 m <sup>3</sup>
	MACHINE NO.	S54	S55	S56	S57	S58

APPLICATION: LOADER, TELESCOPIC LOADER, MINI-LOADER

ADDITIONAL OPTIONS

SIDE BRUSH

**GRAB BUCKET FORGED TINE**

		1,5 M	1,8 M	2,0 M	2,2 M	2,4 M
TECHNICAL SPECIFICATIONS	TINE TYPE	forged tine	forged tine	forged tine	forged tine	forged tine
	NUMBER OF TINES	6	8	9	10	11
	OPENING WIDTH	1000 mm	1000 mm	1000 mm	1000 mm	1000 mm
	WEIGHT	285 kg	381 kg	406 kg	430 kg	460 kg
	CAPACITY	0,75 m <sup>3</sup>	0,90 m <sup>3</sup>	1,00 m <sup>3</sup>	1,10 m <sup>3</sup>	1,20 m <sup>3</sup>
	MACHINE NO.	S59	S60	S61	S62	S63

APPLICATION: LOADER

**GRAB BUCKET BURNED TINE**

		1,5 M	1,8 M	2,0 M	2,2 M	2,4 M
TECHNICAL SPECIFICATIONS	TINE TYPE	burned tine	burned tine	burned tine	burned tine	burned tine
	OPENING WIDTH	1500 mm	1500 mm	1500 mm	1500 mm	1500 mm
	WEIGHT	391 kg	504 kg	550 kg	571 kg	593 kg
	CAPACITY	0,66 m <sup>3</sup>	0,78 m <sup>3</sup>	0,88 m <sup>3</sup>	0,97 m <sup>3</sup>	1,06 m <sup>3</sup>
	MACHINE NO.	S64	S65	S66	S67	S68


APPLICATION: LOADER, TELESCOPIC LOADER



### GRAB BUCKET AV

	1,2 M	1,3 M	1,4 M
TINE TYPE	burned tine	burned tine	burned tine
WEIGHT	160 kg	175 kg	185 kg
CAPACITY	0,30 m <sup>3</sup>	0,33 m <sup>3</sup>	0,36 m <sup>3</sup>
MACHINE NO.	S69	S70	S71

APPLICATION: AVANT



### GRAB BUCKET TELEHANDLERS

	2,0 M	2,2 M	2,4 M
TINE TYPE	forged tine	forged tine	forged tine
WEIGHT	810 kg	830 kg	845 kg
CAPACITY	1,48 m <sup>3</sup>	1,63 m <sup>3</sup>	1,78 m <sup>3</sup>
MACHINE NO.	S72	S73	S74

APPLICATION: TELESCOPIC LOADER

ADDITIONAL  
OPTIONSDOUBLE  
PLOWSHARE

### GRAB

	IT1		IT2				IT2HD			
WIDTH	1,2 m	1,5 m	1,5 m	1,8 m	2,0 m	2,2 m	2,4 m	1,5 m	1,8 m	2,0 m
NUMBER OF TINES	top 5 / bottom 6	top 6 / bottom 7	top 6 / bottom 7	top 8 / bottom 9	top 9 / bottom 10	Top 10 / bottom 11	Top 11 / bottom 12	top 6 / bottom 7	top 8 / bottom 9	top 9 / bottom 10
OPENING WIDTH	1000 mm	1000 mm	1200 mm	1200 mm	1200 mm	1200 mm	1200 mm	1200 mm	1200 mm	1200 mm
WEIGHT	170 kg	200 kg	235 kg	285 kg	325 kg	365 kg	405 kg	260 kg	290 kg	340 kg
LIFTING CAPACITY	600 kg	700 kg	700 kg	800 kg	900 kg	1000 kg	1100 kg	700 kg	800 kg	900 kg
NUMBER OF CYLINDERS	1	1	2	2	2	2	2	2	2	2
MACHINE NO.	S81	S82	S83	S84	S85	S86	S87	S88	S89	S90

APPLICATION: LOADER



### GRAB BUCKET MULTI

	2,0 M	2,2 M	2,4 M
TINE TYPE	burned tine	burned tine	burned tine
WEIGHT	680 kg	710 kg	740 kg
CAPACITY	0,88 m <sup>3</sup>	0,92 m <sup>3</sup>	1,01 m <sup>3</sup>
MACHINE NO.	S75	S76	S77

APPLICATION: TELESCOPIC LOADER

ADDITIONAL  
OPTIONSDOUBLE  
PLOWSHARE

### SILAGE CUTTER ALIGATOR

	1,4 M	1,6 M	1,8 M
WEIGHT	630 kg	700 kg	770 kg
CAPACITY	0,95 m <sup>3</sup>	1,10 m <sup>3</sup>	1,25 m <sup>3</sup>
MACHINE NO.	S91	S92	S93

APPLICATION: LOADER, TELESCOPIC LOADER



### GRAB BUCKET MULTI-GRABIE

	2,0 M	2,2 M	2,4 M
TINE TYPE	burned tine	burned tine	burned tine
WEIGHT	710 kg	750 kg	790 kg
CAPACITY	1,05 m <sup>3</sup>	1,15 m <sup>3</sup>	1,26 m <sup>3</sup>
MACHINE NO.	S78	S79	S80

APPLICATION: TELESCOPIC LOADER

ADDITIONAL  
OPTIONSDOUBLE  
PLOWSHARE

### SILAGE CUTTER COMBI

	1,6 M	1,8 M
WEIGHT	648 kg	690 kg
CAPACITY	1,05 m <sup>3</sup>	1,15 m <sup>3</sup>
MACHINE NO.	S94	S95

APPLICATION: LOADER,  
TELESCOPIC LOADER


**MANURE FORK  
BOTTOM IT1**

	1,2 M	1,5 M	1,8 M	2,0 M
TECHNICAL SPECIFICATIONS				
NUMBER OF TINES	6	7	9	10
WEIGHT	128 kg	143 kg	158 kg	173 kg
MACHINE NO.	S96	S97	S98	S99

APPLICATION: LOADER


**GRAB  
MINI AV**

	1,1 M	1,2 M	1,3 M	1,4 M
TECHNICAL SPECIFICATIONS				
WEIGHT	150 kg	160 kg	175 kg	185 kg
NUMBER OF TINES	6	7	7	8
OPENING WIDTH	800 mm	800 mm	800 mm	800 mm
CAPACITY	0,24 m <sup>3</sup>	0,26 m <sup>3</sup>	0,28 m <sup>3</sup>	0,30 m <sup>3</sup>
NUMBER OF CYLINDERS	1	1	1	1
MACHINE NO.	S110	S111	S112	S113

APPLICATION: AVANT, MINI-LOADER


**MANURE FORK  
BOTTOM IT2**

	1,2 M	1,5 M	1,8 M	2,0 M
TECHNICAL SPECIFICATIONS				
NUMBER OF TINES	6	7	9	10
WEIGHT	137 kg	152 kg	167 kg	182 kg
MACHINE NO.	S100	S101	S102	S103

APPLICATION: LOADER

ADDITIONAL  
OPTIONS

TOP


**GRAB  
MINI O1**

	0,9 M	1,0 M	1,2 M	1,4 M
TECHNICAL SPECIFICATIONS				
WEIGHT	165 kg	175 kg	190 kg	205 kg
TINE TYPE	burned tine	burned tine	burned tine	burned tine
NUMBER OF TINES	6	6	8	9
OPENING WIDTH	1050 mm	1050 mm	1050 mm	1050 mm
CAPACITY	0,30 m <sup>3</sup>	0,35 m <sup>3</sup>	0,42 m <sup>3</sup>	0,50 m <sup>3</sup>
NUMBER OF CYLINDERS	1	1	1	1
MACHINE NO.	S114	S115	S116	S117

APPLICATION: MINI-LOADER


**HD GRAB  
TELEHANDLERS**

	2,0 M	2,2 M	2,4 M
TECHNICAL SPECIFICATIONS			
NUMBER OF TINES	top 10 / bottom 10	top 11 / bottom 11	top 12 / bottom 12
OPENING WIDTH	1000 mm	1000 mm	1000 mm
WEIGHT	605 kg	640 kg	670 kg
CAPACITY	1,20 m <sup>3</sup>	1,40 m <sup>3</sup>	1,46 m <sup>3</sup>
NUMBER OF CYLINDERS	2	2	2
MACHINE NO.	S104	S105	S106

APPLICATION: TELESCOPIC LOADER


**GRAB  
MINI O2**

	1,1 M	1,3 M	1,5 M
TECHNICAL SPECIFICATIONS			
WEIGHT	190 kg	215 kg	230 kg
TINE TYPE	burned tine	burned tine	burned tine
NUMBER OF TINES	6	7	9
OPENING WIDTH	800 mm	800 mm	800 mm
CAPACITY	0,35 m <sup>3</sup>	0,40 m <sup>3</sup>	0,45 m <sup>3</sup>
NUMBER OF CYLINDERS	2	2	2
MACHINE NO.	S118	S119	S120

APPLICATION: MINI-LOADER


**GRAB  
LEAN**

	2,0 M	2,2 M	2,4 M
TECHNICAL SPECIFICATIONS			
NUMBER OF TINES	top 9 / bottom 10	top 10 / bottom 11	top 11 / bottom 12
OPENING WIDTH	1300 mm	1300 mm	1300 mm
WEIGHT	425 kg	440 kg	460 kg
CAPACITY	1,40 m <sup>3</sup>	1,50 m <sup>3</sup>	1,60 m <sup>3</sup>
NUMBER OF CYLINDERS	2	2	2
MACHINE NO.	S107	S108	S109

APPLICATION: TELESCOPIC LOADER


**BALE  
TRANSPORTER**

	2 TINES	3 TINES	4 TINES	6 TINES
TECHNICAL SPECIFICATIONS				
MACHINE NO.	S121	S122	S123	S124

APPLICATION: LOADER, TELESCOPIC LOADER,  
MINI-LOADER

PALLET FORK  
IT

TECHNICAL SPECIFICATIONS	WITHOUT TOP EXTENSION		WITH TOP EXTENSION	
	3a/2a	3a/2a	3a/2a	3a/2a
FORK CLASS	3a/2a	3a/2a	3a/2a	3a/2a
DIMENSIONS OF FORK 3A	100/45/1200	100/45/1200	100/45/1200	100/45/1200
DIMENSIONS OF FORK 2A	80/40/1200	80/40/1200	80/40/1200	80/40/1200
ACCESSORIES	-	sleeves	top extension	top extension, sleeves
MACHINE NO.	SI25	SI26	SI27	SI28

APPLICATION: LOADER 2A, TELESCOPIC LOADER 3A, MINI-LOADER 2A, AVANT 2A

2a - 2000 kg  
3a - 3000 kg

BALE  
LIFT

TECHNICAL SPECIFICATIONS	SINGLE MECHANICAL	DOUBLE MECHANICAL	HYDRAULIC	DOUBLE HYDRAULIC
	HEIGHT	460 mm	460 mm	700 mm
WIDTH	1100 mm	2100 mm	1200 mm	2400 mm
ARM LENGTH	1250 mm	1250 mm	1250 mm	1250 mm
NUMBER OF ARMS	2	4	2	4
WEIGHT	104 kg	165 kg	185 kg	280 kg
MACHINE NO.	SI29	SI30	SI31	SI32

APPLICATION: LOADER, TELESCOPIC LOADER

BIG BAG  
LIFT

TECHNICAL SPECIFICATIONS	
WEIGHT	105 kg
LIFTING CAPACITY	1100 kg
MACHINE NO.	SI46

LEVELER  
AV

TECHNICAL SPECIFICATIONS	1300 MM	1500 MM
	WEIGHT	165 kg
MACHINE NO.	SI47	SI48

APPLICATION: AVANT

## LIGHT REAR CONTAINER

TECHNICAL SPECIFICATIONS	MECHANICAL					HYDRAULIC			
	1,2 m	1,4 m	1,6 m	1,8 m	2,0 m	1,6 m	1,8 m	2,0 m	
WIDTH	1,2 m	1,4 m	1,6 m	1,8 m	2,0 m	1,6 m	1,8 m	2,0 m	
WEIGHT	190 kg	205 kg	220 kg	235 kg	250 kg	345 kg	360 kg	375 kg	
NUMBER OF CYLINDERS	-	-	-	-	-	1	2	2	
CAPACITY	0,65 m <sup>3</sup>	0,75 m <sup>3</sup>	0,85 m <sup>3</sup>	1,00 m <sup>3</sup>	1,10 m <sup>3</sup>	0,95 m <sup>3</sup>	1,05 m <sup>3</sup>	1,05 m <sup>3</sup>	
MACHINE NO.	SI33	SI34	SI35	SI36	SI37	SI38	SI39	SI40	

APPLICATION: TUZ

REAR CONTAINER  
HYDRAULIC

TECHNICAL SPECIFICATIONS	1,6 M	1,8 M	2,0 M	2,2 M	2,4 M
	WEIGHT	480 kg	500 kg	520 kg	540 kg
NUMBER OF CYLINDERS	2	2	2	2	2
MIN. CAPACITY (OPEN COVER)	1,00 m <sup>3</sup>	1,15 m <sup>3</sup>	1,25 m <sup>3</sup>	1,35 m <sup>3</sup>	1,50 m <sup>3</sup>
MAX. CAPACITY (CLOSED COVER)	1,45 m <sup>3</sup>	1,60 m <sup>3</sup>	1,80 m <sup>3</sup>	1,95 m <sup>3</sup>	2,10 m <sup>3</sup>
MACHINE NO.	SI41	SI42	SI43	SI44	SI45


APPLICATION: EU / TUZ

\*a galvanized option of the cargo box is available

EXCAVATOR ARM  
AV

TECHNICAL SPECIFICATIONS	IT RAM 01	IT RAM 01
	DIGGING DEPTH	1,40 m
BUCKET WIDTH	0,25 m	0,40 m
WEIGHT	110 kg	120 kg
MACHINE NO.	SI49	SI50

APPLICATION: AVANT

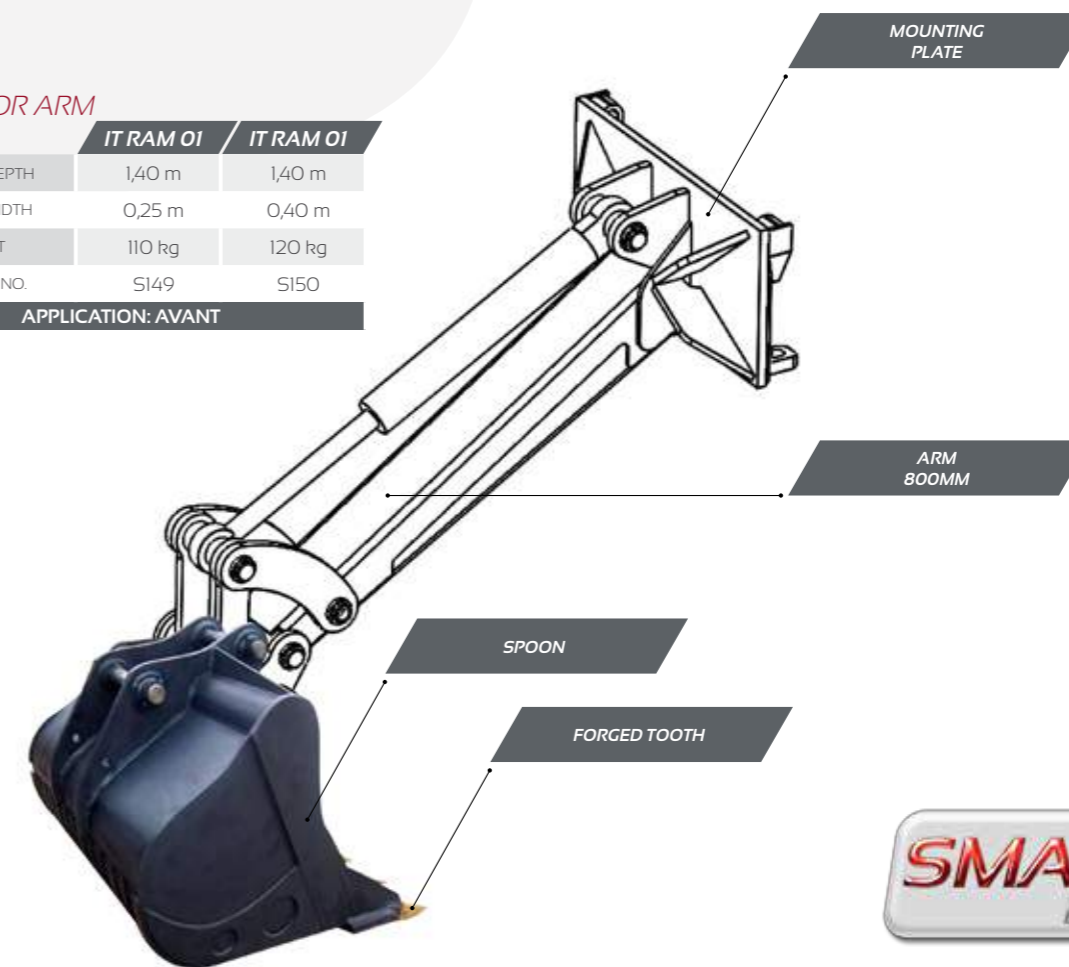

SMART  
LINE



# MUNICIPAL MACHINES

Learn about products in our  
**2020**  
ORANGE LINE



## HYDRAULIC PLOW

TECHNICAL SPECIFICATIONS	PSSHV-01		PSSHV-02		PSSHV-03		
	WORKING WIDTH	2,5 m	3,15 m	2,2 m	2,5 m	2,1 m	2,6 m
MINIMUM	2,15 m	2,7 m	1,9 m	2,2 m	2,05 m	2,45 m	2,85 m
MAXIMUM	2,5 m	3,15 m	2,2 m	2,5 m	2,2 m	2,6 m	3,0 m
MOULDBOARD HEIGHT	1,04 m	1,04 m	0,9 m	0,9 m	0,82 m	0,82 m	0,82 m
TURN ANGLE	30	30	25	25	23	23	23
NUMBER OF HYDRAULIC TERMINALS	2	2	2	2	2	2	2
COUPLING TYPE	TPH cat. I, II	TPH cat. I, II	TPH cat. I, II	TPH cat. I, II	TUZ	TUZ	TUZ
WEIGHT	630 kg	690 kg	310 kg	360 kg	320 kg	370 kg	430 kg
MACHINE NO.	O1	O2	O3	O4	O5	O6	O7

	PSSHV-01	PSSHV-02	PSSHV-03
<b>IN STANDARD VERSION</b>			
LED LIGHTING	✓	✓	✓
GAUGE WHEELS/SLIDES	✓	✓	
<b>ADDITIONAL EQUIPMENT</b>			
STEEL PLOWSHARE mb	✓	✓	✓
POLYURETHANE PLOWSHARE mb	✓	✓	✓
EURO/TPH FRAME	✓	✓	✓
GAUGE WHEELS/SLIDES			✓



## HYDRAULIC PLOW

TECHNICAL SPECIFICATIONS	PSSH-02			PSSH-03		PSSH-04		
	WORKING WIDTH	2,2 m	2,6 m	3,0 m	2,65 m	2,95 m	2,2 m	2,6 m
MINIMUM	2,05 m	2,45 m	2,85 m	2,37 m	2,72 m	2,05 m	2,45 m	2,85 m
MAXIMUM	2,2 m	2,6 m	3,0 m	2,65 m	2,95 m	2,2 m	2,6 m	3,0 m
MOULDBOARD HEIGHT	0,83 m	0,83 m	0,83 m	1,06 m	1,06 m	0,82 m	0,82 m	0,82 m
TURN ANGLE	23	23	23	24	24	23	23	23
NUMBER OF HYDRAULIC TERMINALS	2	2	2	2	2	2	2	2
COUPLING TYPE	EURO, TUZ	EURO, TUZ	EURO, TUZ	TUZ	TUZ	EURO, TUZ	EURO, TUZ	EURO, TUZ
WEIGHT	315 kg	330 kg	355 kg	640 kg	685 kg	365 kg	390 kg	420 kg
MACHINE NO.	O8	O9	O10	O11	O12	O13	O14	O15

	PSSH-02	PSSH-03	PSSH-04
<b>IN STANDARD VERSION</b>			
LED LIGHTING		✓	✓
GAUGE WHEELS/SLIDES		✓	✓
<b>ADDITIONAL EQUIPMENT</b>			
STEEL PLOWSHARE mb	✓	✓	✓
POLYURETHANE PLOWSHARE mb	✓	✓	✓
LED LIGHTING	✓		
EURO/TPH FRAME	✓	✓	✓
GAUGE WHEELS/SLIDES	✓		



**RIGID PLOW**

TECHNICAL SPECIFICATIONS	MOULDBOARD HEIGHT	0,85 m
	COUPLING TYPE	EURO
	WEIGHT	175 kg
	MACHINE NO.	O16
		2,2 M

	RIGID PLOW	RIGID PLOW HYDRAULIC
<b>IN STANDARD VERSION</b>		
EURO/TPH FRAME		
LED LIGHTING		
GAUGE WHEELS/SLIDES		
<b>ADDITIONAL EQUIPMENT</b>		
STEEL PLOWSHARE mb	✓	✓
POLYURETHANE PLOWSHARE mb		✓
LED LIGHTING	✓	
EURO/TPH FRAME	✓	
GAUGE WHEELS/SLIDES	✓	



**HYDRAULIC PLOW**

TECHNICAL SPECIFICATIONS	WORKING WIDTH	2,0 m
	MINIMUM	1,82 m
	MAXIMUM	2,0 m
	MOULDBOARD HEIGHT	0,49 m
	DIMENSIONS: HEIGHT/WIDTH	25
	NUMBER OF HYDRAULIC TERMINALS	2
	COUPLING TYPE	AVANT
	WEIGHT	150 kg
	MACHINE NO.	O17
		MINI



**CORN PUSHER**

TECHNICAL SPECIFICATIONS	WEIGHT	820 kg	930 kg
	MACHINE NO.	O18	O19
		2,9 M	3,7 M

**CORN PUSHER HYDRAULIC**

TECHNICAL SPECIFICATIONS	DISK HEIGHT	0,8 m	1,2 m	1,4 m
	WIDTH FOR TRANSPORT	3 m	3 m	3 m
	COUPLING TYPE	TUZ kat II i III	TUZ kat II i III	TUZ kat II i III
	WEIGHT	1250 kg	1650 kg	1800 kg
	NUMBER OF HYDRAULIC TERMINALS	2	2	2
	DISK FOLDING ANGLE	90°	90°	90°
	MACHINE NO.	O20	O21	O22
		5 M	5 M	5 M



We deliver  
**WHAT?**  
help

**WHEN?**  
for heavy duty work

**SNOW & ICE**



**MANURE SCRAPER**

TECHNICAL SPECIFICATIONS	WEIGHT	120 kg	140 kg
	MACHINE NO.	O23	O24
		2,5 M	2,6 M



**SIDE SWEEPER**

TECHNICAL SPECIFICATIONS	WEIGHT	180 kg
	MACHINE NO.	O25
		IT



**InterTech™**  
MASZYNY ROLNICZE

**P.P.H.U. INTER-TECH Piotr Jankowski**

Aleja Wojska Polskiego 100

18-300 Zambrów

☎ 86 225 22 40

✉ [sekretariat@intertech-agro.pl](mailto:sekretariat@intertech-agro.pl)

**CUSTOMER SERVICE:**

☎ 532 777 775

☎ 735 200 555

☎ 735 775 588

✉ [zamowienia@intertech-agro.pl](mailto:zamowienia@intertech-agro.pl)

**SPARE PARTS:**

☎ 504 060 181

☎ 722 777 773

☎ 501 060 161

✉ [sklep@intertech-agro.pl](mailto:sklep@intertech-agro.pl)

**SERVICE:**

☎ 506 215 191

☎ 532 777 776

☎ 722 777 774

✉ [serwis@intertech-agro.pl](mailto:serwis@intertech-agro.pl)

✉ [technolog@intertech-agro.pl](mailto:technolog@intertech-agro.pl)



*This price list does not constitute an offer or tender according to the provisions of the Civil Code. INTER-TECH is not liable for claims related to the data and photographs contained in this price list.*

*The offer contains selected models of machinery, and errors may be present.*

*Photographs do not always reflect standard equipment. In relation to its continuous development, INTER-TECH reserves the right to make changes to products and prices without giving prior notice.*

*Before making a purchase, please contact an authorized INTER-TECH dealer or contact INTER-TECH's sales department directly.*

*\*The guarantor's obligations and buyer's rights are provided in the guarantee statement.*